

AX'Label Classic 73x18 UHF

AX'Label Classic UHF line offers excellent reading performance on non-metallic equipment. They have been designed for the industrial, logistics and retail sectors.

AXEM Technology guarantees AX'Label's resistance over several years for industrial applications in indoor or outdoor environments.

AX'Label are compatible with Toshiba **BA410 printer**.

For use in an extremely harsh environment, reinforce your AX'Label with the **Protect +** protective film. Your AX'Label becomes AX'Label + capable of resisting water, dust, abrasion, and UV rays.


Functional specifications

RFID Protocol	EPC global and ISO 18000-63
Frequency	Global: 840 ~940 MHz
IC type	Ucode8
Memory	EPC 128bits, TID: 96bit
Write Cycles	100,000 times
Functionalities	Read/write
Data Retention	20 years
Applicable Surface	Off metal

Physical specifications

Size	73 x 18mm
Material	PET soft
Mounting Methods	Standard adhesive or reinforced adhesive 3M467
Packaging	Reel 2500pcs

Measured read range

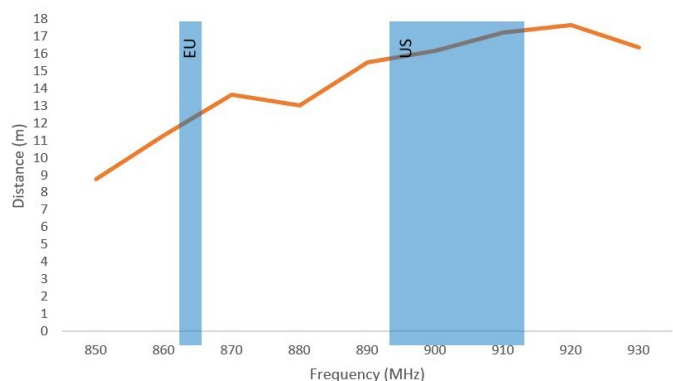

Item codes

ETUHF1452	AX'Label Classic UHF, UCode8, PET Soft, reinforced adhesive 3M467, 73X18mm
ETUHF1748	AX'Label Classic UHF, UCode7, PET Soft, reinforced adhesive 3M467, 73X18mm
ETUHF1847	AX'Label Classic UHF, UCode8, PET Soft, Coated Paper, standard adhesive, 73X18mm

V3.0

Non-contractual datasheet