


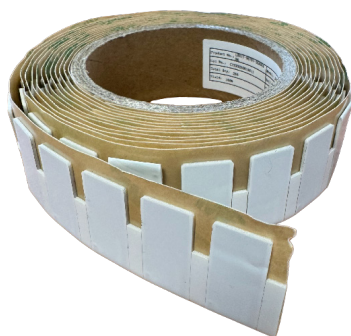

AX'Label Platina 30x15

This label is part of our range of RAIN RFID (UHF) metal compatible labels: AX'Label Platina.

The entire range of labels has a PET protective top layer that can be customized with text, logo, barcode, QR codes....

AX'Label Platina are compatible with thermal transfer printers. For use in an extremely harsh environment, reinforce your AX'Label with the **Protect +** protective film. Your AX'Label becomes AX'Label + capable of resisting water, dust, abrasion, and UV rays.

Functional specifications

Type	RAIN RFID (UHF)
RFID Protocol	EPC Global Class1Gen2 and ISO 18000-63/6C compliant
Frequency	ETSI (865-868 MHz) and FCC (902-928 MHz)
Chip type	M780
Memory	EPC: 496-bits, TID: 96-bits, User: 128-bits, Kill password: 32-bits
Write Cycles	100,000 times
Functionalities	Read/write, Protected Mode, Lock Access
Data Retention	20 years
Applicable Surface	On metal
Read range	ETSI (865-868 MHz): 3 m / FCC (902-928 MHz): 3 m

Physical specifications

Size	30 x 15 mm
Thickness	1,25 mm
Mounting Methods	3M467 Strong adhesive
Packaging	500 pcs / roll

Environmental specifications

Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C

Reference

A/ETUHF2462	AX'Label Platina UHF, 30x15 mm, M780 chip, reinforced adhesive 3M 467
-------------	---

V1.0

Non-contractual datasheet