




AX'Label Classic 43x63 UHF

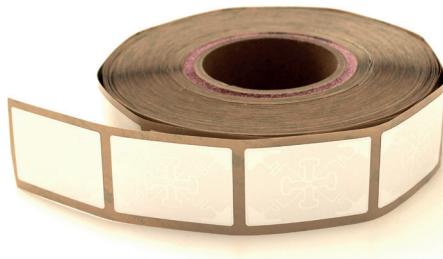

AX'Label Classic UHF line offers excellent reading performance on non-metallic equipment. They have been designed for the industrial, logistics and retail sectors.

AXEM Technology guarantees AX'Label's resistance over several years for industrial applications in indoor or outdoor environments.

AX'Label are compatible with Toshiba **BA410 printer**.

For use in an extremely harsh environment, reinforce your AX'Label with the **Protect +** protective film. Your AX'Label becomes AX'Label + capable of resisting water, dust, abrasion, and UV rays.

Functional specifications

RFID Protocol	EPC global and ISO 18000-63
Frequency	Global: 840 ~940 MHz
IC type	M4E
Memory	EPC memory: 496bits, user memory: 128bits, Kill/Access: 64 bits
Write Cycles	100,000
Functionalities	Read/write
Data Retention	50 years
Applicable Surface	Off metal


Physical specifications

Size	43 x 63mm
Material	PET soft or PET soft + coated paper
Mounting Methods	Standard adhesive or reinforced adhesive 3M467
Packaging	Reel 1000pcs

More about AX'Label Classic UHF range :



Measured read range

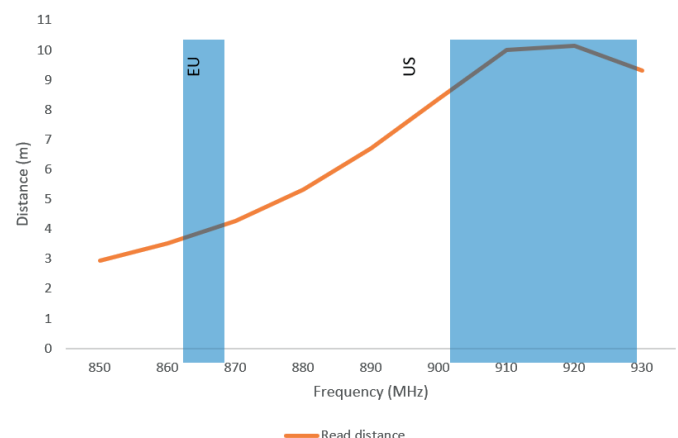

Item codes

ETUHF1699

AX'Label Classic UHF, M4E, PET Soft, reinforced adhesive 3M467, 43x63mm

ETUHF1849

AX'Label Classic UHF, M4E, PET Soft, Coated Paper, standard adhesive, 43x63mm

V2.0

Non-contractual datasheet