



Armored 400c UHF

The Armored 400c UHF tag provides identification and tracking capabilities never-before available in rugged or hazardous use-areas. Indeed, this tag can withstand temperature, but also pressure and harsh environmental conditions.

Key features

- Resistance to very high temperature
- Multiples fixing methods : welding or bolting
- IP68 protection grade

Applications

Metal surfaces: metal returnable containers, metal canisters, metal pallets, high value metal items, aerospace applications, military applications...

Functional specifications

Type	UHF
Frequency	860 MHz - 960 MHz
Air interface protocol	EPC Global Class1Gen2; ISO 18000-63
IC Type	Impinj Monza X-8K Dura; Quanray available
Memory	EPC memory: 128 bits; user memory: Monza X-8K Dura ; 8K byte; TID: 96 bits
Read range	Real-world: 1-2 meters, depending on attachment / Lab environment: > 6m

Physical specifications

Dimensions	Length: 61 mm / Width: 53 mm / Height: 24mm. Flange; 8 mm
Tag Material	Shell: Steel shell
Mounting Method	Welding or bolting the tag
Applicable surface	Any material : metal surfaces; ferrous and non-ferrous
Color	Black

V4.1

Non-contractual datasheet

Environmental and industry compliance

Certificates	RoHS compliant ATEX-compliant ISO 17665 - Sterilization of Health Care Products - Moist Steam ISO 11135 - Sterilization of Health Care Products - Ethylene Oxide
IP classification	IP68: complete protection against dust / protection against continuous immersion in water (tested for 5hours in 1m [3.3 ft] depth, immersion in water to be qualified in any industrial application)
Storage Temperature	-50°C to +400°C*
Operating Temperature	-50°C to +85°C*
Peak temperature	+400°C for 1 hour*
Temperature Cycling Test	One hour at 400°C slight cool-down; 30-day test cycle*
Weather ability	Excellent, including UV-resistance and sea water immersion*
Pressure resistance	Embedded RFID tag tested to 30,000psi for 30 days*
Chemical resistance	No physical or performance changes in: - Salt water* - NaOH* - Sulfuric acid* - Motor oil (tested in 168 hour exposure)* Generally good against : - Most solvents* - Most acids and bases*

*According to tests performed under optimal conditions, environmental resistance to be qualified in any industrial application

Note: The RFID tag will not be functional if it is left at the maximum indicated temperatures such that the internal soak temperature exceeds +80°C. The RFID itself will function between -50°C and +80°C .

The Armored 400c casing reflects the heat and WILL protect the RFID tag at the elevated temperatures (until the RFID tags' internal temperature exceeds +80°C)

The Armored 400c tags coll-down time is significantly accelerate (to and below 80°C).

End result - the Armored 400c tag will FUNCTION at extreme temperatures.



V4.1
Non-contractual datasheet

Read range

	Max read range on metal with 4W ERP
Armored 400c (915 MHz FCC or 868mHz ETSI)	660.4 cm / 260 inches (6.63 m / 21.75 feet)



The read range listed above was obtained from a lab test environment. Actual test results may be different. Testing in actual use environments is strongly recommended.

Radiation pattern

Axial radiation pattern; obtained in anechoic test laboratory.

Actual in-use radiation pattern may vary.

Testing in actual use environments in strongly recommended

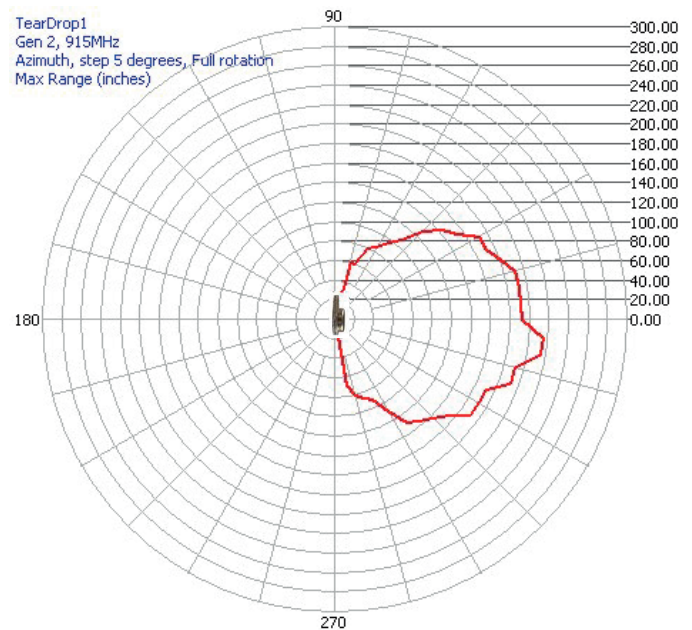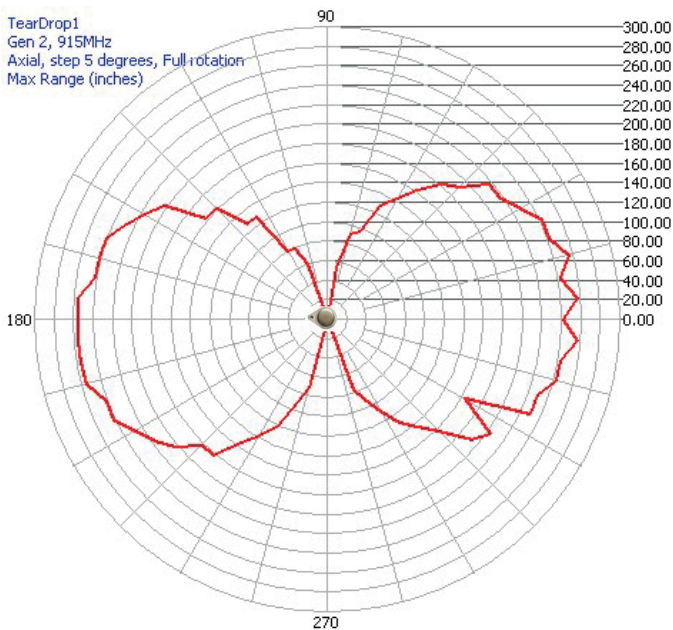

Supported services

Several options are available:

- Tag pre-encoding
- Laser engraving

For further details, please contact AXEM Technology

V4.1

Non-contractual datasheet

Installation instructions

TAG PLACEMENT

The Armored 400c tag must be mounted to the metal surface with the metal «cup» pointed up and with no metal covering the tag.

When selecting the mounting location, ensure the following:

- Select an even metal surface so that the entire flat plate (spacer material) of the Armored 400c is in contact with the mounting surface.
- Place the tag in the middle of the largest metal mounting surface available.
- Before welding or bolting the tag, it is recommended that the tag be taped to the metal surface to check orientation and performance.

The Armored 400c's performance depends on the shape of the metal object and the tags placement on that surface. The above recommendations are valid for flat surfaces. Testing is recommended to verify performance in each use-case, especially when mounting to curved surfaces.

TAG ATTACHING METHODS

The tag can be either bolted or welded metal surface.

1. Bolting the tag to the metal surface

Bolting achieves effective mounting and retention in various use conditions.

The Armored 400c can be mechanically attached using:

- Screws (size M4)
- Pop ts (size 4mm)

Critical bolting information:

The spacer permanently mounted under the Armored 400c provides the needed functional air-gap between the tag and the mounting surface. The tag must be flush with the metal surface and not "bowed". DO NOT REMOVE THE SPACER MATERIAL from the bottom of the tag. Removing the spacer material will keep the tag from operating.

2. Welding the tag to the metal surface

Welding achieves the most effective mounting and retention method. However, the tag must be welded according to the following guidelines, or the RFID tag may not function correctly (or at all).

Procedure

The tag should be welded in two "spots" or across the entire end of the tab. See the pictures below.