



## Flextan UHF

Flexible, thin and durable, flextan allows the identification and tracking of items in non-metallic environments. Resistant to water, chemicals and high temperatures, it can be integrated during a vulcanization process to manage returnable transport items (shuttle cases, pallets, etc.) used for moving or transporting goods in logistics.

### Key features



**Autoclave**

### Applications


- Laundries
- textile
- electronics
- high-temperature applications...

## Functional specifications

Type	UHF
Frequency	Global: 860-960 MHz
Air interface protocol	EPC Class1 Gen2, ISO18000-6C
IC Type	Ucode 8
Memory	EPC 128bits, TID 96bits
Data retention	20 years
Write Cycles	100,000 times
Functionalities	Read/write

## Physical specifications

Dimensions	80 x 9 x 0,4mm
Tag Material	Flexible PCB
Applicable surface	Off metal

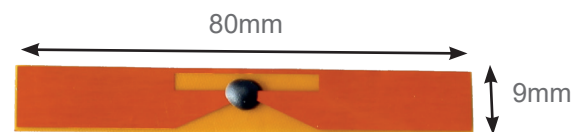

## Environmental and industry compliance

Protection grade	IP68
Storage Temperature	-45°C to +220°C
Operating Temperature	-45°C to +85°C

V3  
Non-contractual document

## Durability

### Temperature stress

Test methods	Descriptions	Pass/fail
Peak temperature	Stored in convection oven at 220°C	Pass
-45<>85°C, 50 cycles	Stored in temperature shock chamber for 50 cycles, one cycle includes 30 min at -45C, 30 min, transition, 30min at 85C and 30min transition	Pass
85°C/85%, 24hrs	Stored in humidity chamber at 85C/85%RH for 24hours	Pass
Boiling water, 6 hrs	Immersed in boiling water for 6hours	Pass

### Ingression

IP grade	IP68	1.5meter deep immersion, 1hour
----------	------	--------------------------------

### Mechanical stress

Test methods	Descriptions	Pass/fail
Vibration	IEC60068-2-6/64	Pass
Drop & topple	IEC60068-2-31	Pass
Shock (acceleration)	IEC60068-2-22	Pass


### Chemical stress

Test methods	Descriptions	Pass/fail
Alkali	NaOH (10%, pH13)   Immersed 24hours	Pass
Acid	Sulfuric acid (10%, pH2)   Immersed 24hours	Pass
Petroleum	Gasoline, Diesel, Kerosene, lubricating oil   Immersed 24hours	Pass
Alcohol	Methanol, Ethanol   Immersed 24hours	Pass
Surfactant	Solvent for metal tool oils   Immersed 24hours	Pass
Salt water	IEC60068-2-11	Pass

### Electrical stress

ESD	IEC61000-4-2 (LEVEL4 – 8KV)	Pass
-----	-----------------------------	------

## Measured read range

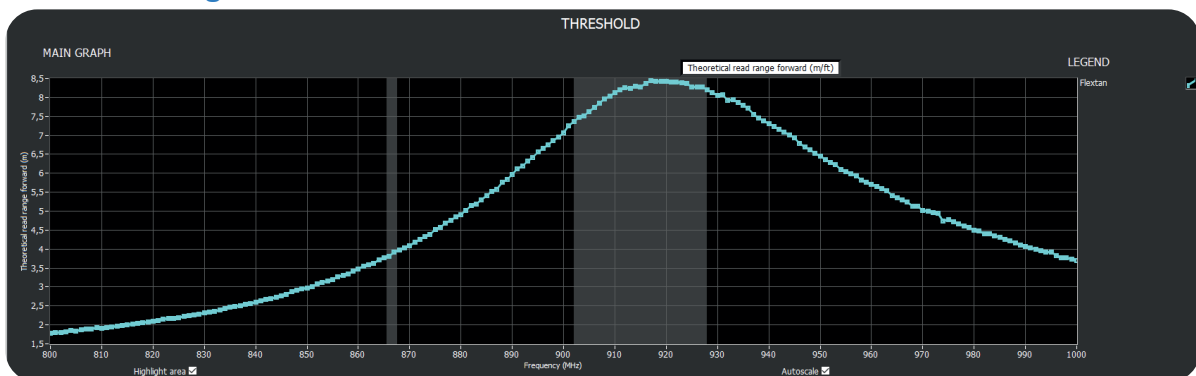

## References

FLUHF1344

Tag FLEXTAN, Ucode 8, 80x9x0,4mm, global

V3

Non-contractual document