


AX'Label Classic 2K 102x39 UHF

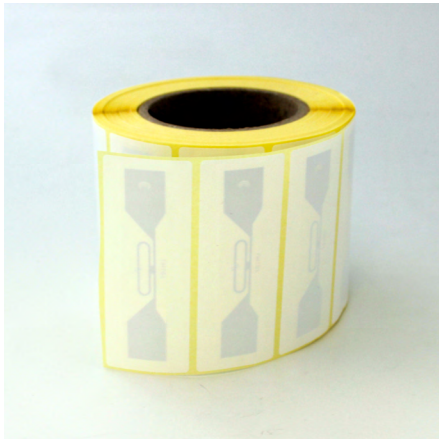

AX'Label Classic UHF line offers excellent reading performance on non-metallic equipment. The labels have been designed for the industrial, logistics and retail sectors.

Large user memory

2 Kbits user memory

Customisation

Marking, encoding, adhesive, printing by Toshiba **BA410** printer.

Protect +

With the **Protect +** protective film. your AX'Label resists to water, dust, abrasion, and UV rays.

Item reference : ETUHF1420EU

Functional specifications

RFID Protocol	EPC global and ISO 18000-63
Frequency	Global: 840 ~940 MHz
IC type	Ucode 7xm+
Memory	EPC: 448 bit / TID: 96-bit / User Memory: 2-kbit bits / Access password: 32 bit / Kill password: 32 bit / Digital signature: 384 bits
Write Cycles	100,000 times
Functionalities	Read/write
Data Retention	20 years
Applicable Surface	Off metal


Physical specifications

Size	102*39mm
Material	Standard permanent adhesive
Packaging	Roll of 1000 on 76mm core

More about AX'Label Classic UHF range :



Measured read range

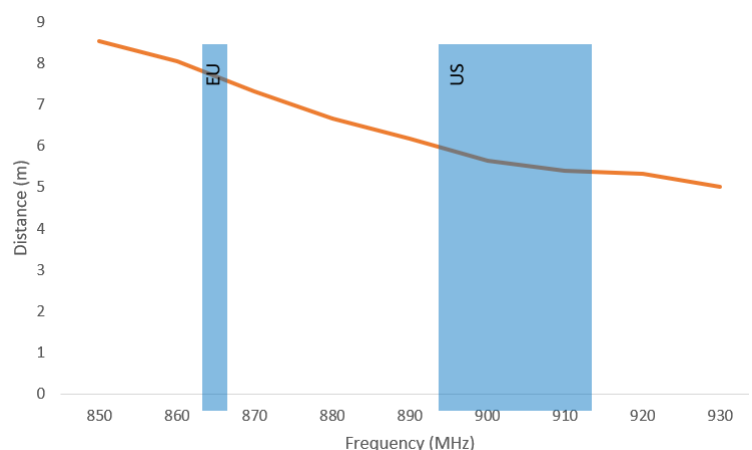

V1.0

Non-contractual datasheet