


DiscTag

DiscTag are transparent and low profile tags designed for use on non-metal surface. Equipped with adhesive backing, they can be attached to cards, key or any other item. They are available in LF (125Khz) and HF (13.56 MHz) frequencies.

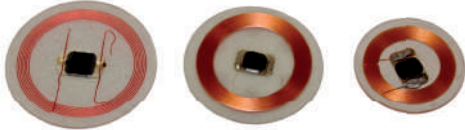

Options

- Encoding
- Laser engraving

Applications

- Access control
- Item tracking
- Asset management

Specifications

| Diameter (mm) | D20 | D22 | D25 | D26 | D27 |
|---------------|-----------------|------------|--------|----------------|--|
| Material | Transparent PVC | | | | |
| Adhesive | Without | Without | With | With | With and without |
| RFID | HF | LF | LF | HF | HF or LF |
| Frequency | 13,56MHz | 125Khz | 125Khz | 13,56MHz | 13,56MHz or 125Khz |
| IC type | 1K | HITAG S256 | HITAG2 | Desfire EV3 2K | 1K Mifare 4K Mifare PLUS SE Desfire EV2 2K Desfire EV3 2K Desfire EV3 4K 5577 HiTag S |

Item codes

| | |
|-------------|--|
| DT25BF0499 | Disctag D25 LF PET Hitag2, adhesive |
| DTD20HF1150 | DiscTag D20 HF ISO14443A 1K PET |
| DTD22BF0539 | DiscTag D22 LF HITAGS 256 |
| DTD26HF1802 | DiscTag D26 HF Iso 14443A, Desfire EV3 2K, adhesive, 70pF |
| DTD27BF0049 | DiscTag D27 LF 5577 PET with adhesive |
| DTD27BF0050 | DiscTag D27 LF Hitag S 2048 bits PET |
| DTD27HF0145 | DiscTag D27 HF ISO14443A 1K PET, adhesive |
| DTD27HF0285 | DiscTag D27 HF Mifare 4K, adhesive |
| DTD27HF0789 | DiscTag D27 HF ISO14443A MIFARE PLUS SE MF1SEP1001, adhesive |
| DTD27HF1819 | DiscTag D27 HF ISO14443A MIFARE PLUS SE, adhesive, 70pF |
| DTD27HF1929 | DiscTag D27 HF Iso 14443A, Desfire EV2 4K, adhesive, 70pF |
| DTD27HF1930 | DiscTag D27 HF Iso 14443A, Desfire EV3 2K, adhesive, 17pF |
| DTD27HF2106 | DiscTag D27 HF Iso 14443A, Desfire EV3 4K, adhesiv, 17pF |
| DTD42HF0237 | DiscTag D42 HF Iso 14443A, Desfire EV1 4K, with adhesive |

V1.0

Non-contractual datasheet