


AX'Lin Small Heat-sealing



This 35 x 15mm tag is designed and manufactured in France. It enables to blindly identify clothing and linen volumes.

The polycotton and flexible tag can be heat-sealed to flat linen, workwear...



MR Conditional

Made in France

Options

- Resistance to sterilization processes (autoclave) Encoding option
- Other customizations on request

Key features



MRI certified



200 cycles



60 bars



Heat-sealing

Applications

Management of industrial washing of PPE, workwear, personal clothing, flat linen, carpets, etc.

Physical specifications

Dimensions	35 (L) x 15 (W) x <2 (H) mm
Material	Polycotton, polyester on request
Color	White
Installation method	Heat-sealing: 12s @ 204°C (399°F) heat sealing and >0,5kg/cm ² pressure or thread installation

Functional specifications


Type	UHF
Frequency	Global: 860 to 960MHz
Air interface protocol	EPC Class1 Gen2; ISO18000-6C
IC Type	Ucode 8
Memory	EPC: up to 128 bits
Data retention	20 years
Functionalities	Read/write
Read range	Up to 2,5 meters (ERP=2W)
Option	Encoding




Environmental and industry compliance

Certificates	REACH and ROHS OEKO-TEX Standard 100 level 1 CMRT
Test	European EPC Competence Center (EECC)
Compatibility	MR Conditional (1,5T and 3T)
Laundry cycle constraints	Maximum temperature: 204°C (392°F), 12 sec Water extractor: 60 bars Washing: 90°C (194°F), 15 minutes, 200 cycles or 50 cycles autoclave sterilization Drying in tumbler: 180°C (320°F), 30minutes Tunnel finisher: 185°C (365°F), 20 min Sterilization process: 135°C (275°F), 20 minutes
Relative humidity	10% to 95%
Chemicals	Normal common chemicals in the washing processes

Forward read range - free air

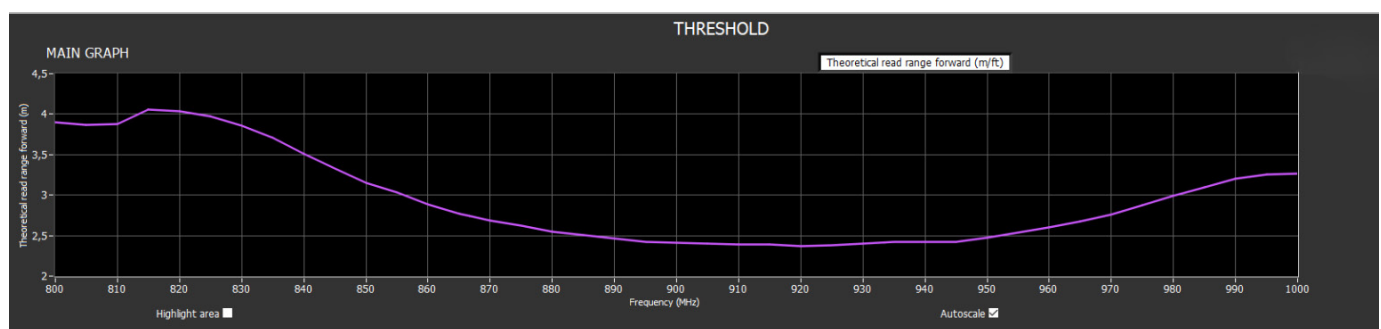

Reverse read range - free air

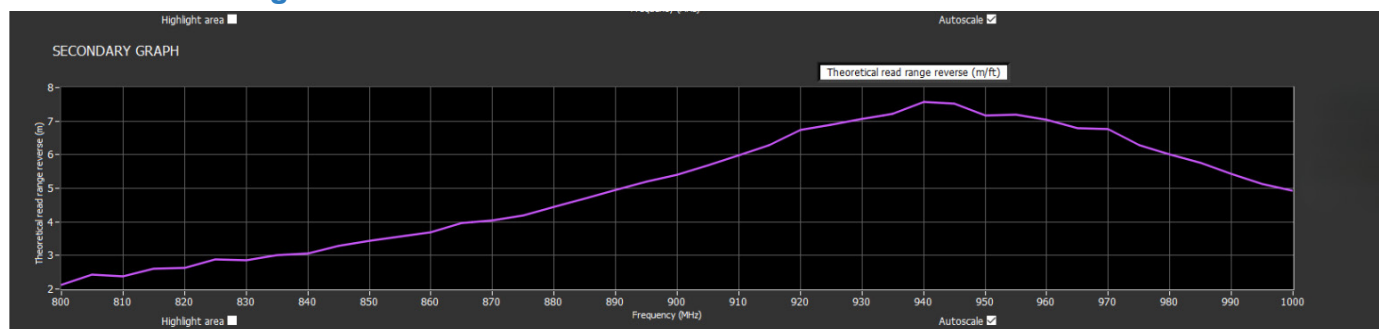

Item code

LINEPUHF1968/N

AX'Lin Small UHF Laundry, EPC Class1 Gen2, ISO18000-6C, heat-sealing glue, 35x15mm, UCODE 8, Global

V3.3

Non-contractual datasheet

AXEM Technology

11-13, rue Auguste Perret - ZAC Europarc - 94042 Créteil Cedex France

Tél. : +33 (0)1 41 94 11 85 - Fax. : +33 (0)1 49 56 91 52 - commercial@axemtec.com - www.axemtec.com