



AX'Label Staple

AX'Label Staple RAIN RFID (UHF) 90x25mm comply with EPC global Gen 2 (V1.2.0) and ISO 18000-6C:2004 label specifications. They are suitable for tracking non-metallic materials and equipment. AX'Label Staple are supplied in bags.

Customization

- UID encoding
- Printing: logo, Datamatrix, barcode, QR codes...

Applications


- Equipment identification for individual monitoring
- Stock management
- Application on wood, logs or other stapleable surfaces

Functional specifications

Type	RAIN RFID (UHF)
RFID Protocol	ISO 18000-6C2004
Frequency	EU : 865 Mhz à 868 Mhz
IC type	H9
Memory	EPC: 96 bits - TID: 48 bits - en reserved: 32 bits User memory: 688 bits
Write cycles	200,000 cycles
Functionalities	Read/write
Data retention	50 years
Applicable surface	Any surface that can be stapled: wood, tree trunks...

Physical specifications

Size	90x25mm
Thickness	0.25mm
Material	Hard PET
Mounting methods	Staple
Packaging	200pcs/bags

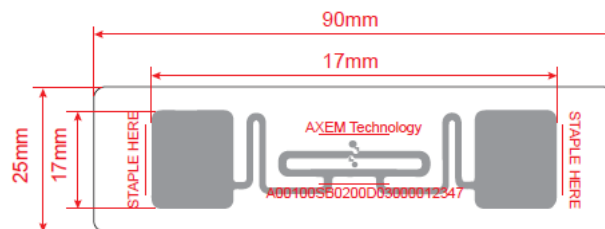


V1.1

Non-contractual datasheet

Environmental and industrial compliance

Storage temperature	Ambient temperature 50% relative humidity
Operating temperature	-20°C to +60°C

Reading range

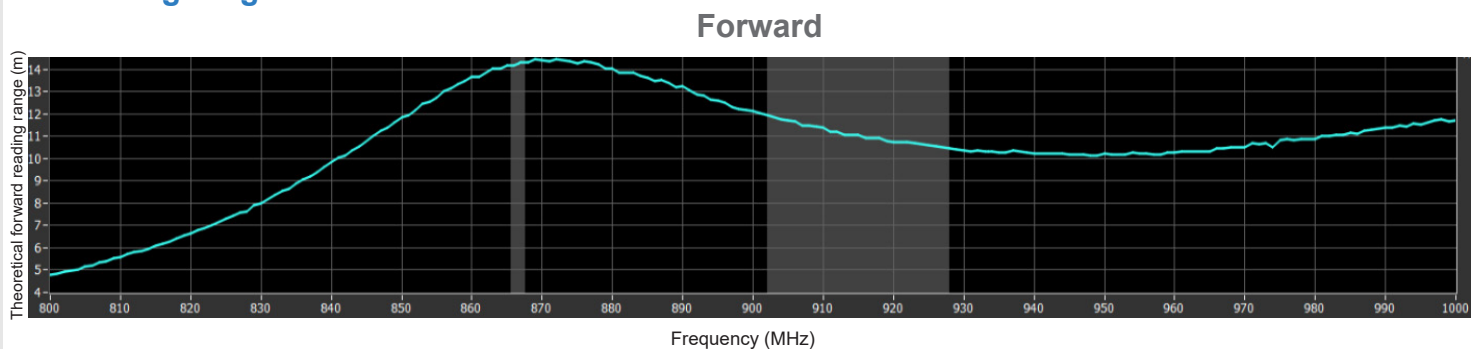

Item code

ETUHF2179	AX'Label Classic UHF, inlay 9962, hard PET, wood staple, 90x25mm
-----------	--