



## AX'Label Platina 30x15 UHF

This label is part of our range of UHF metal compatible labels range: AX'Label Platina.

The entire range of labels has a PET protective top layer that can be customized with text, logo, barcode, QR codes....

AX'Label Platina are compatible with Toshiba **BA410 printer**.

For use in an extremely harsh environment, reinforce your AX'Label with the **Protect +** protective film. Your AX'Label becomes AX'Label + capable of resisting water, dust, abrasion, and UV rays.

### Functional specifications

RFID Protocol	EPC global and ISO 18000-63 compliant, Gen2v2 compliant
Frequency	Global: 840 ~940 MHz
IC type	Monza R6P
Memory	User memory: 32(64)bits ; EPC memory: 128(96) bits
Write Cycles	100,000 times
Functionalities	Read/write
Data Retention	Up to 50 years
Applicable Surface	On metal


### Physical specifications

Size	30*15mm
Thickness	1.25mm
Mounting Methods	Adhesive (standard or strong)
Packaging	Reel, 800 units/reel

### Environmental specifications

Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C

### Measured read range

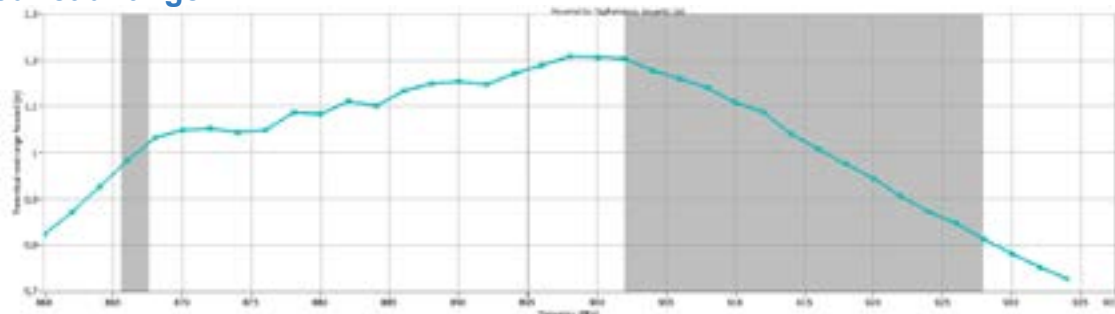

ETUHF1136US	AX'Label Platina UHF, Monza R6P, Adhésif renforcé 3M467, 30x15mm, Metal, US
A/ETUHF1321	AX'Label Platina UHF, Monza R6P, Adhésif renforcé 3M467, 30x15mm, Metal, EU
ETUHF1136	AX'Label Platina UHF, Monza R6P, Adhésif renforcé 3M467, 30x15mm, Metal, EU

V3.1

Non-contractual datasheet