

MBS



4300 mAh removable battery



RAM 3GB + ROM 32GB
Option: 4GB + 64GB



IP65
40°C ~+70°C
5% RH ~95°RH non condensing
Multiple 1.5m, 2.4m



RFID NFC
Option: UHF with UniSled and MagSled



Keyboard emulation for 2D (HID)

V4.1
Non-contractual datasheet

General specifications

Operating System	Android 9.0
CPU	Qualcomm 1.8GHz Octa-core
Memory	3GB+32GB / option: 4GB+64GB
Extended storage	Supports up to 128 GB Micro SD card
Dimensions	160 x 76 x 15.5mm
Weight	287g (device with battery)
Display	5.5-inch high definition full display (18:9), IPS LTPS 1440*720
Battery	4300 mAh removable main battery Standby: over 300 hours (only main battery) Continuous use: over 12 hours (depending on user environment) Charging time: 2.5 hours by standard adaptor and USB cable
I/O Ports	USB3.0, Type-C, OTG,
Keys	1 power key, 2 scan keys , 2 volume keys , 1 PTT key
Camera	Rear 13MP Autofocus with flash, support for image and video formats
Other - general	2 Microphones, 1 for noise reduction Sensors: gravity sensor, proximity sensor, light sensor, accelerometer sensor, vibration motor

Wireless communication

Wifi	802.11 a/b/g/n/ac
Bluetooth	Bluetooth 4.2/4.1+HS/4.0/3.0+HS/2.1+EDR
3G / 4G	WWAN (Europe, Asie) : 2G: 850/900/1800/1900MHz, 3G: CDMA EVDO: BC0, WCDMA: 850/900/1900/2100MHz, TD-SCDMA: A/F(B34/B39), 4G: B1, B3, B5, B7, B8, B20, B38, B39, B40, B41 WWAN (Amérique) : 2G: 850/900/1800/1900MHz, 2G: 850/900/1800/1900MHz, 4G: B2, B4, B5, B7, B12, B17, B38
GPS	GPS/AGPS, GLONASS, BeiDou, internal antenna

User Environment

Operating temperature	-20°C to +50°C
Storage temperature	-40°C to +70°C
Humidity	5% RH ~95%RH non condensing
Protection grade	IP65 per IEC sealing specifications
Drop Specification	Multiple 1.5m/4.9ft drops (at least 20 times) to the concrete across the operating temperature range Multiple 2.4 m / 7.87 ft. drops (at least 20 times) to the concrete after installed rubber bumper
Tumble Specification	1000 x 0.5m / 1.6ft falls at room temperature
ESD	±15KV air discharge, ±8KV conductive discharge


V4.1

Non-contractual datasheet

Data collection

UHF (option MagSled or MBS UHF)

Engine	Based on Impinj Indy R2000
Frequency	865-868 MHz / 920-925 MHz / 902-928 MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Power	1W (30 dBm, +5 dBm to +30 dBm adjustable)

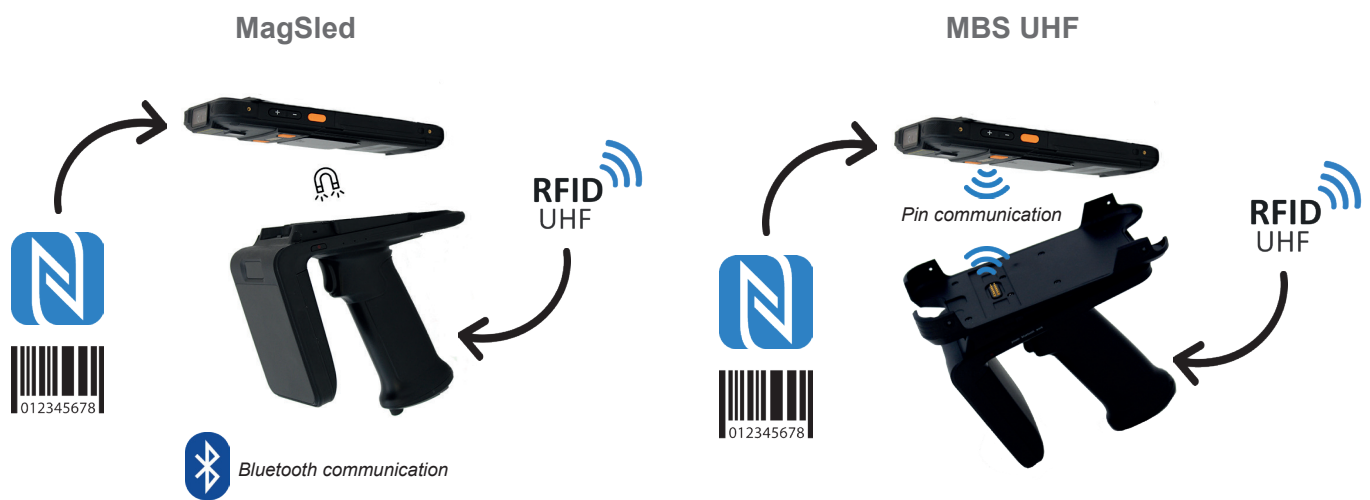

HF/NFC

Frequency	13,56MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4cm

Barcode 1D/2D (option)

1D/2D Barcode Scanner	SE4710
1D Symbolologies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Symbolologies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX),etc..

Accessories

See our [catalog](#).

V4.1

Non-contractual datasheet