


AX'Label Classic for liquid container 70x30mm

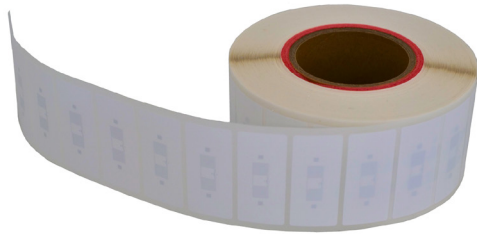

AX'Label Classic for liquid container line are an UHF labels that have an excellent reading performance on liquids containers. They have been designed for the industrial, medical and retail sectors. AXEM Technology guarantees AX'Label's resistance over several years for industrial applications in indoor or outdoor environments.

AX'Label are compatible with Toshiba **BA410 printer**.

For use in an extremely harsh environment, reinforce your AX'Label with the **Protect +** protective film. Your AX'Label becomes AX'Label + capable of resisting water, dust, abrasion, and UV rays.

Functional specifications

RFID Protocol	EPC Global Class1Gen2; ISO 18000-6C
Frequency	865-868 MHz (EU) 902-928 MHz (US)
IC type	Ucode 9
Memory	96-bit of EPC memory, supports pre-serialization of 96-bit EPC 96-bit Tag Identifier (TID) factory-locked 48-bit unique serial number factory-encoded into TID 32-bit kill password to permanently disable the tag 96-bit Tag Identifier (TID) factory-locked 48-bit unique serial number factory-encoded into TID 32-bit kill password to permanently disable the tag
Write cycles	100,000 times
Functionalities	Read/write
Data retention	20 years
Applicable surface	On liquid container

Physical specifications

Size	70x30mm
Material	PET
Mounting methods	Permanent adhesive
Packaging	2000 labels/roll

Item code

ETUHF1986EU AX'Label UHF, EPC Global Class1Gen2; ISO 18000-6C, PET, 70x30mm

V1.0

Non-contractual datasheet